




24V Easy Cabinet Lighting



**Kitchen
Cabinet
Distributors™**

tresco®
lighting

Cabinet Sized LED Kits.....	3 - 7
LED Pucks	8
LED Tape Lighting.....	9
PowerSync Controllers	10
Power Supplies	11

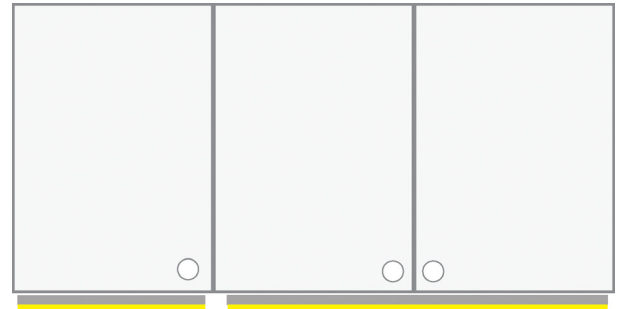

Easy Sizes

The lights are sized specifically to fit your cabinets. One light per cabinet, no more dark spots.

Easy Kits

The kits have all the components needed to install. Kits include:

(1) Aluminum Satin Nickel LED Linear Light w/ 3" input & 3" output cords, (2) 96" Extension/Starter Cords, (2-4) Mounting Clips, (2-4) Magnets with quick install plates, and (1) Milk Diffuser.



Extra 96" Extension/Starter Cords

Two extra wire extensions are included to extend the input or output leads. Installers will always have what they need, when they need it.

Easy Packaging

Installers can easily identify the appropriate kit for each cabinet with simple and clear labeling. Example: an 18" wall cabinet will use a kit marked "L-EZSW18-XXXX-1"



Easy Mounting



The lights mount magnetically to metal mounting plates, which are adhered to the cabinet with 3M VHB™ tape for even greater ease and efficiency.



3M VHB™


9"W - 18"W Face Frame Wall Cabinets

- Cabinet sized LED linear lights
- Package is labeled with the cabinet size the fixture is designed to fit
- Maximum continuous run: 16' (192")
- Dimmable
- 2.8W/ft.
- Beam spread: 110°
- Lumens per foot: 390
- CRI value: 90+
- Aluminum construction
(acts as a heat sink to extend the life of the LEDs)
- Satin nickel finish
- Surface mounted
- Commercial grade 5-year warranty

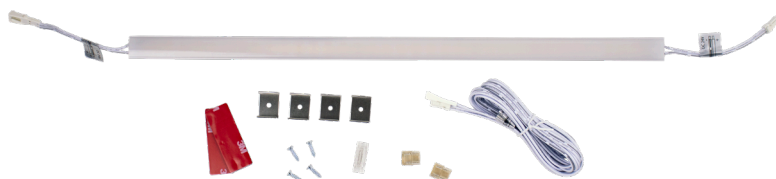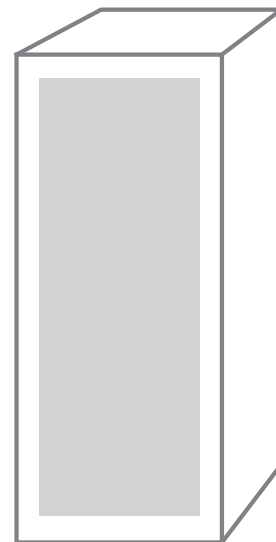

Kit Includes:

- (1) Aluminum LED Linear Light w/3" Input & 3" Output Cords (Attached)
- (2) 96" Extension/Starter Cords
- (2-4) Mounting Clips
- (2-4) Magnets with Mounting Plates
- (1) Milk Diffuser

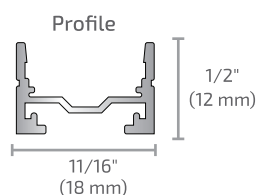

Accessories:

● Required ● Optional



Power Supplies
See page 11





Dimmer Switches
See page 10

US PATENT NO: D783,533 and 9,618,194

Item#	Fits Face Frame Wall Cabinet	Light Length	Watts	Light Fixture Size	Color Temp.	Light Color	Finish
TLEZSW935K1KCD	9"W	7"L	2.50	7"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel
TLEZSW1235K1KCD	12"W	9"L	2.50	9"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel
TLEZSW1535K1KCD	15"W	12"L	3.30	12"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel
TLEZSW1835K1KCD	18"W	15"L	4.00	15"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel


21"W - 48"W Face Frame Wall Cabinets

- Cabinet sized LED linear lights
- Package is labeled with the cabinet size the fixture is designed to fit
- Maximum continuous run: 16' (192")
- Dimmable
- 2.8W/ft.
- Beam spread: 110°
- Lumens per foot: 390
- CRI value: 90+
- Aluminum construction
(acts as a heat sink to extend the life of the LEDs)
- Satin nickel finish
- Surface mounted
- Commercial grade 5-year warranty

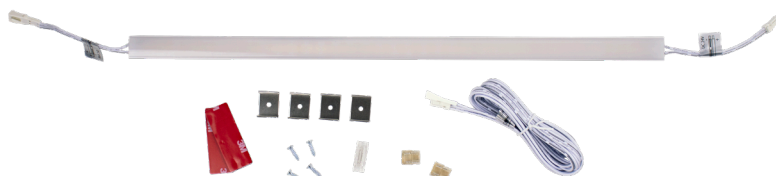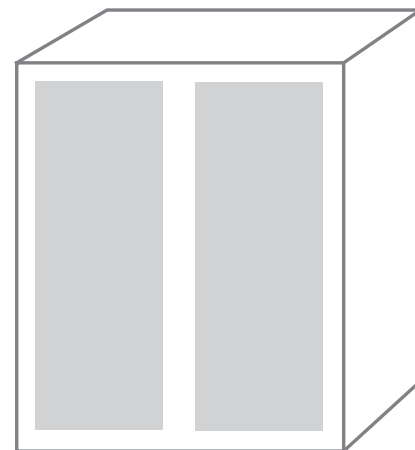

Kit Includes:


- (1) Aluminum LED Linear Light w/3" Input & 3" Output Cords (Attached)
- (2) 96" Extension/Starter Cords
- (2-4) Mounting Clips
- (2-4) Magnets with Mounting Plates
- (1) Milk Diffuser



US PATENT NO: D783,533 and 9,618,194





Accessories: ● Required ● Optional

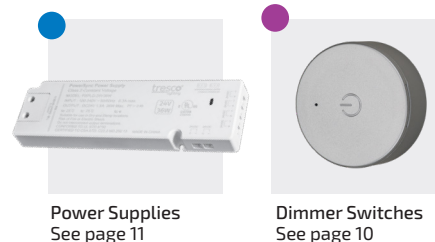

Item#	Fits Face Frame Wall Cabinet	Light Length	Watts	Light Fixture Size	Color Temp.	Light Color	Finish
TLEZSW2135K1KCD	21"W	18"L	4.75	18"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel
TLEZSW2435K1KCD	24"W	21"L	5.50	21"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel
TLEZSW2735K1KCD	27"W	24"L	6.25	24"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel
TLEZSW3035K1KCD	30"W	27"L	7.00	27"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel
TLEZSW3335K1KCD	33"W	30"L	7.75	30"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel
TLEZSW3635K1KCD	36"W	33"L	8.50	33"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel
TLEZSW3935K1KCD	39"W	36"L	9.25	36"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel
TLEZSW4235K1KCD	42"W	39"L	10.00	39"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel
TLEZSW4535K1KCD	45"W	42"L	10.75	42"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel
TLEZSW4835K1KCD	48"W	45"L	11.50	45"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel


24"W & 27"W Face Frame Wall Angled Corner Cabinets

- Cabinet sized LED linear lights
- Package is labeled with the cabinet size the fixture is designed to fit
- Maximum continuous run: 16' (192")
- Dimmable
- 2.8W/ft.
- Beam spread: 110°
- Lumens per foot: 390
- CRI value: 90+
- Aluminum construction
(acts as a heat sink to extend the life of the LEDs)
- Satin nickel finish
- Surface mounted
- Commercial grade 5-year warranty

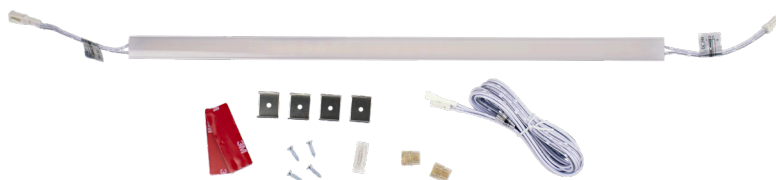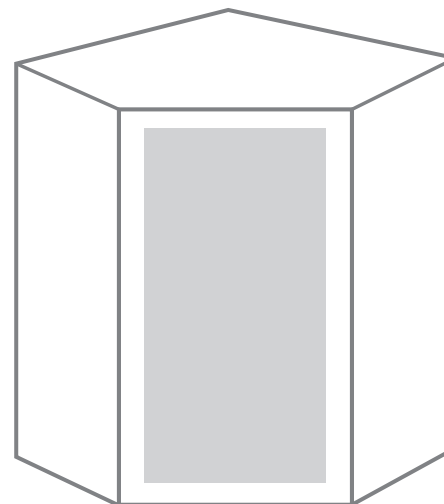

Kit Includes:

- (1) Aluminum LED Linear Light w/3" Input & 3" Output Cords (Attached)
- (2) 96" Extension/Starter Cords
- (2-4) Mounting Clips
- (2-4) Magnets with Mounting Plates
- (1) Milk Diffuser



Accessories: ● Required ● Optional



Power Supplies
See page 11





Dimmer Switches
See page 10

US PATENT NO: D783,533 and 9,618,194

Item#	Fits Face Frame Wall Cabinet	Light Length	Watts	Light Fixture Size	Color Temp.	Light Color	Finish
TLEZSW2435K1KCD	24"W	21"L	5.50	21"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel
TLEZSW2735K1KCD	27"W	24"L	6.25	24"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel


24"W Face Frame Wall Square Corner Cabinet

- Cabinet sized LED linear lights
- Package is labeled with the cabinet size the fixture is designed to fit
- Maximum continuous run: 16' (192")
- Dimmable
- 2.8W/ft.
- Beam spread: 110°
- Lumens per foot: 390
- CRI value: 90+
- Aluminum construction (acts as a heat sink to extend the life of the LEDs)
- Satin nickel finish
- Surface mounted
- Commercial grade 5-year warranty

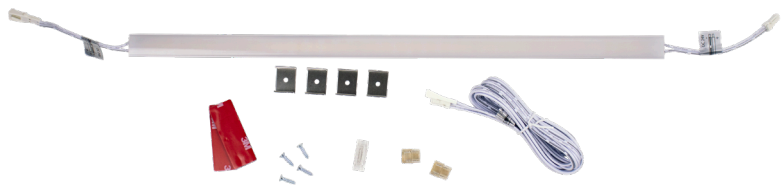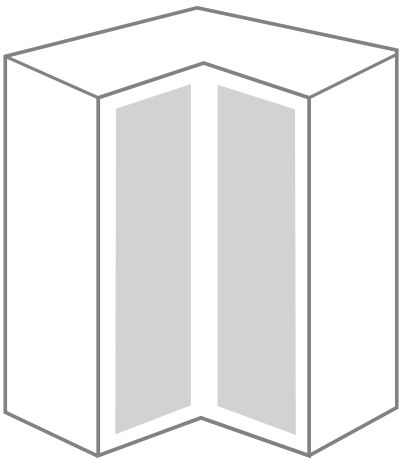

Kit Includes - (2) Kits needed for this application):


- (1) Aluminum LED Linear Light w/ 3" Input & 3" Output Cords (Attached)
- (2) 96" Extension/Starter Cords
- (2) Mounting Clips
- (2) Magnets with Mounting Plates
- (1) Milk Diffuser



Accessories: ● Required ● Optional



Power Supplies
See page 11





Dimmer Switches
See page 10

US PATENT NO: D783,533 and 9,618,194

Item#	Fits Face Frame Wall Cabinet	Light Length	Watts	Light Fixture Size	Color Temp.	Light Color	Finish
TLEZSW1235K1KCD	24"W	9"L	2.50	9"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel


24"W - 30"W Face Frame Wall Blind Corner Cabinet

- Cabinet sized LED linear lights
- Package is labeled with the cabinet size the fixture is designed to fit
- Maximum continuous run: 16' (192")
- Dimmable
- 2.8W/ft.
- Beam spread: 110°
- Lumens per foot: 390
- CRI value: 90+
- Aluminum construction
(acts as a heat sink to extend the life of the LEDs)
- Satin nickel finish
- Surface mounted
- Commercial grade 5-year warranty

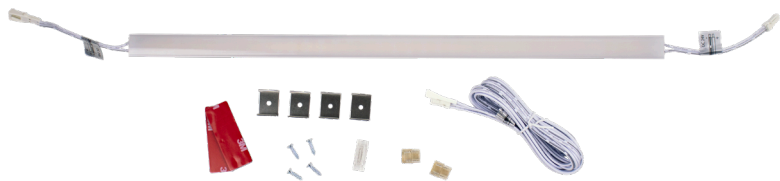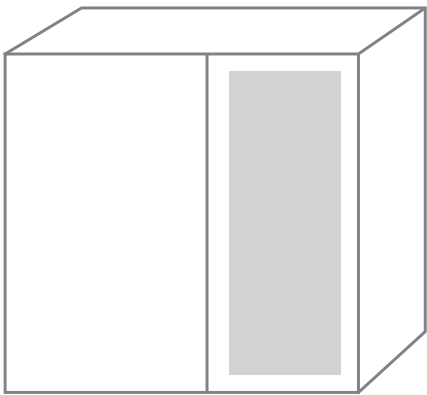

Kit Includes:


- (1) Aluminum LED Linear Light w/3" Input & 3" Output Cords (Attached)
- (2) 96" Extension/Starter Cords
- (2-4) Mounting Clips
- (2-4) Magnets with Mounting Plates
- (1) Milk Diffuser



Accessories: ● Required ● Optional



Power Supplies
See page 11



Dimmer Switches
See page 10

US PATENT NO: D783,533 and 9,618,194


Item#	Fits Face Frame Wall Cabinet	Light Length	Watts	Light Fixture Size	Color Temp.	Light Color	Finish
TLEZSW2435K1KCD	24"W	21"L	5.50	21"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel
TLEZSW2735K1KCD	27"W	24"L	6.25	24"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel
TLEZSW3035K1KCD	30"W	27"L	7.00	27"L x 11/16"W x 1/2"H	3500K	Neutral	Satin Nickel

OptiPockit DM Recessed LED Puck Light

- Wide 110° beam spread
- Nickel, Black and White finishes
- Surface mount ring (*sold separately*)
- Dimmable
- High output (279 lumens)
- CRI value: 90+
- Luniform output - no "dots"
- Commercial grade 5-year warranty



OptiPockit Surface Mount Accessories

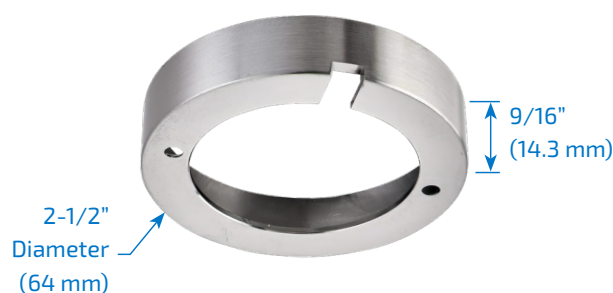

Accessories: ● Required ● Optional



Power Supplies
See page 11



Dimmer Switches
See page 10

OptiPockit Recessed LED Puck Light

Item #	Description
TLOPDM24R35KNBW1	OptiPockit Dimmable, 24VDC Round, 3W, 3500K, NI/WH/BL Trims
TLOPACSARNI1	OptiPockit, Round Surface Mount Ring, Nickel
TLOPACSARBL1	OptiPockit, Round Surface Mount Ring, Black
TLOPACSARWH1	OptiPockit, Round Surface Mount Ring, White

Tape Lighting & Accessories

FlexTape® SMD combines high-density LED technology with installer-friendly innovation for beautifully uniform illumination. Advanced proprietary LEDs deliver exceptional color accuracy, while Clearview connectors eliminate shadowing for clean, seamless lighting layouts. With easy-to-work-with copper pads, consistent cut points, eco-friendly packaging, and compatibility with Infinex extrusions, FlexTape® offers a smarter way to achieve professional-grade lighting results.



24VDC
Starter Cord



24VDC
FlexTape®Link Cord



FlexTape® SMD	
Item #	Description
TLMEDFLEXT	24VDC FlexTape SMD, 3500K, 16 ft. spool
TLFLEXTPADAPT	79" 24VDC Starter Cord, with 2-Wire Splicer
TLFLTPELNK2DFE1	2" FlexTape® to FlexTape® connectors, with Wire Splicer
TLFLTPELNK6DFE1	6" FlexTape® to FlexTape® connectors, with Wire Splicer

PowerSync Controllers



Designed to pair seamlessly with Tresco® PowerSync plug-in power supplies and Tresco LED lighting, these controllers offer intuitive, reliable control for any application from subtle accent lighting to full task illumination. With options including dimmable and on/off touch styles, recessed and surface mount designs, and motion- and door activated controls. Whether activated by a simple touch, a wave of your hand, or the opening of a cabinet door, the controllers deliver effortless control in finishes ranging from White to Nickel (varies by model). The result is clean integration, consistent performance, and lighting that responds naturally to how spaces are used.



Touch Dimmer



Round Dimmer



Receiver



PowerSync Controllers	
Item #	Description
TLPSWLSCRD**1	Wireless Touch Dimmer, Black or Nickel
TLPSWLSCTD**1	Wireless Round Dimmer, Black or Nickel
TLPSWLSRCW1	Wireless Receiver, White

Must have at least one receiver (TLPSWLSRCW1) to operate
A single dimmer can be programmed to up to 10 different receivers
These wireless controllers can be positioned wherever you want within 30 ft. (9 m) of the lights to be controlled

Power Supplies

Our 24VDC power supplies are the workhorses behind all of our 24VDC LED lighting products, delivering reliable constant voltage technology designed to maintain performance and extend the life of LED fixtures. Their slim design features MINI power ports for easy installation, along with centralized control ports on the plug-in variations for seamless integration of controllers and accessories into your lighting system. Up to 10 of these PowerSync models can be linked through the centralized pink ports, while an indicator light changes from green to red to signal potential power supply damage. For a cleaner, more tailored installation, the A/C power cord can also be cut and shortened.*

The 60W and 96W PowerSync models offer additional flexibility with an independent MINI port for dual control options and a 5-amp terminal block to support higher-wattage applications with enhanced reliability and performance. All models feature Class 2 constant voltage output, high power factor (PF>0.95) and built-in short circuit, overcurrent, overload, and RFI protection, with dimming available through standard LED wall dimmers on the hardwire styles.



24VDC 36W
Power Supply



24VDC 60W
Power Supply



24VDC 96W
Power Supply



24VDC 96W
Power Supply



Power Supplies

Item #	Description
TLPSPLG24V36W1	36W PowerSync Power Supply w/ (6) MINI Ports
TLPSPLG24V60W1	60W PowerSync Power Supply w/ (6) MINI Ports and a 5 amp terminal block
TLPSPLG24V96W1	96W PowerSync Power Supply w/ (6) MINI Ports and a 5 amp terminal block
TLDCE96DCON1	96W Hardwire Dimmable Power Supply



www.kcdus.com